
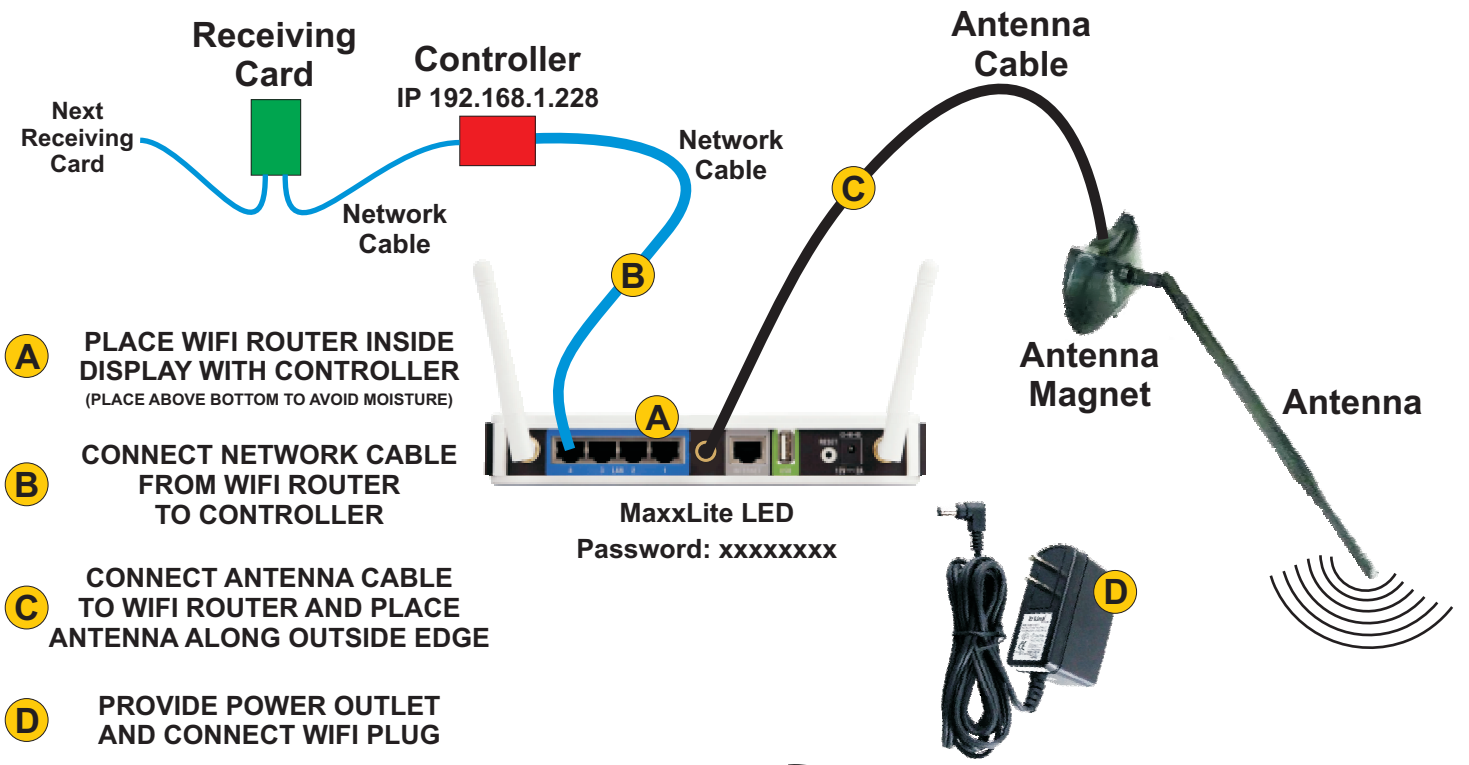




WIFI NETWORK CONNECTION SETUP

Single controller configuration

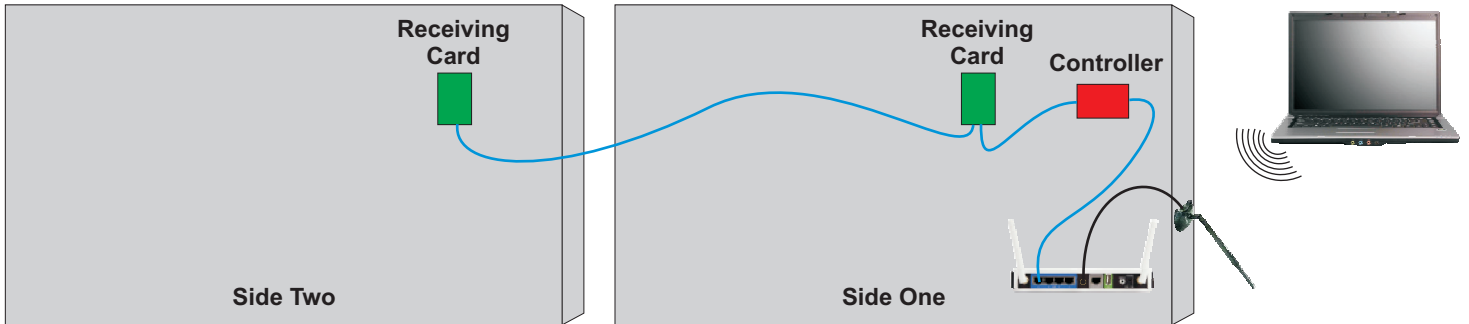

Connect to Network: MaxxLite LED
Password: XXXXXXXX

WIFI NETWORK CONNECTION SETUP Two or more controller configuration

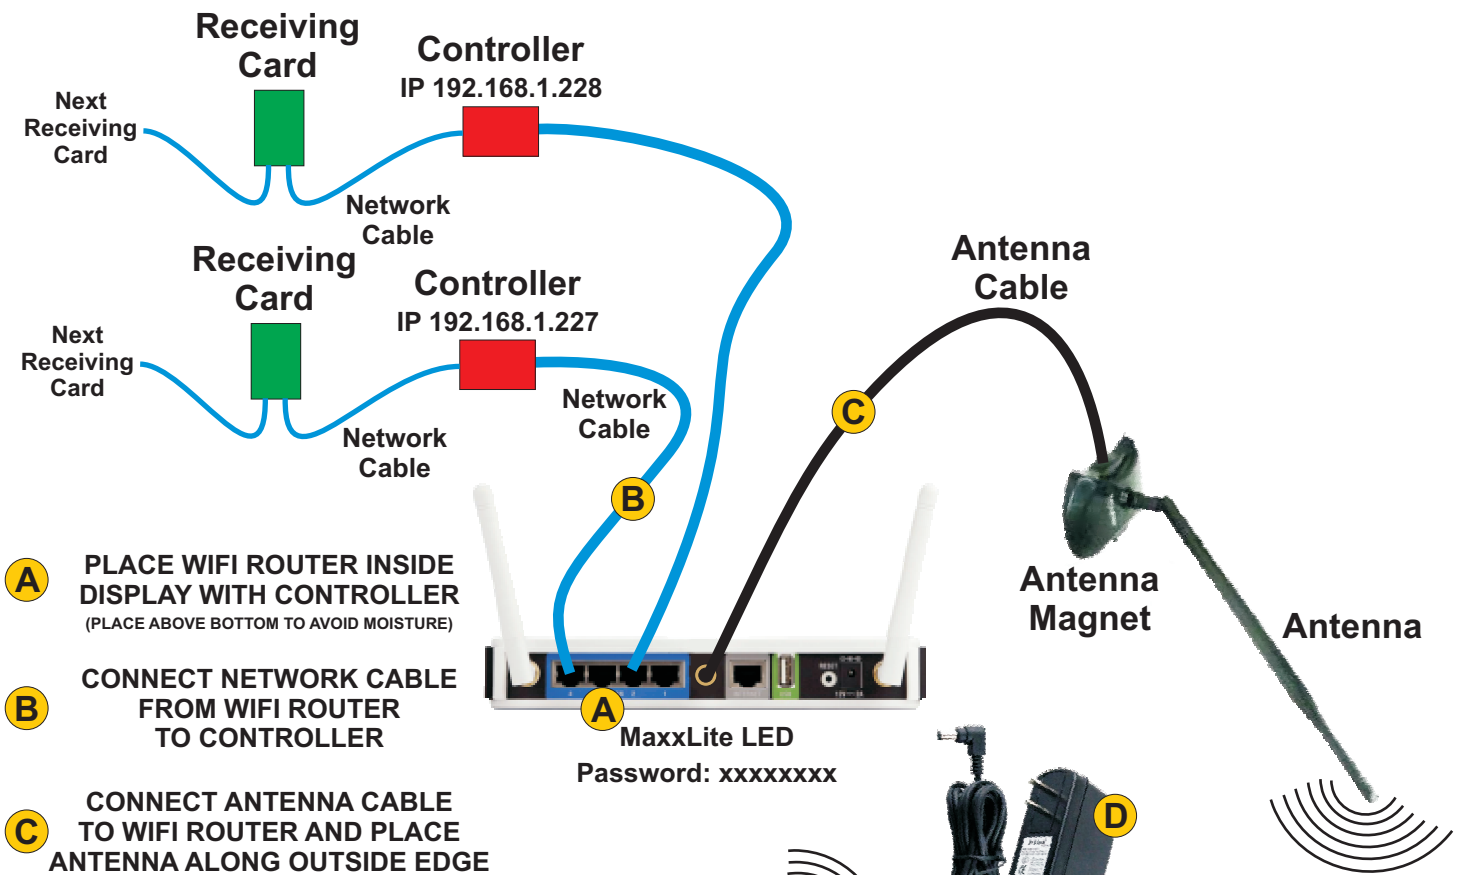
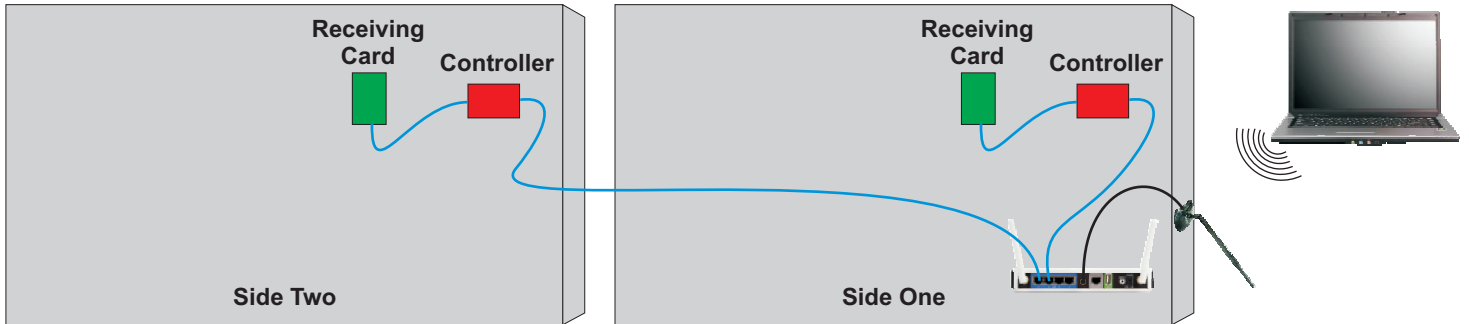


- A** PLACE WIFI ROUTER INSIDE DISPLAY WITH CONTROLLER
(PLACE ABOVE BOTTOM TO AVOID MOISTURE)
- B** CONNECT NETWORK CABLE FROM WIFI ROUTER TO CONTROLLER
- C** CONNECT ANTENNA CABLE TO WIFI ROUTER AND PLACE ANTENNA ALONG OUTSIDE EDGE
- D** PROVIDE POWER OUTLET AND CONNECT WIFI PLUG


MaxxLite LED
Password: xxxxxxxx

Connect to Network: MaxxLite LED
Password: XXXXXXXX

DIRECT NETWORK CONNECTION SETUP

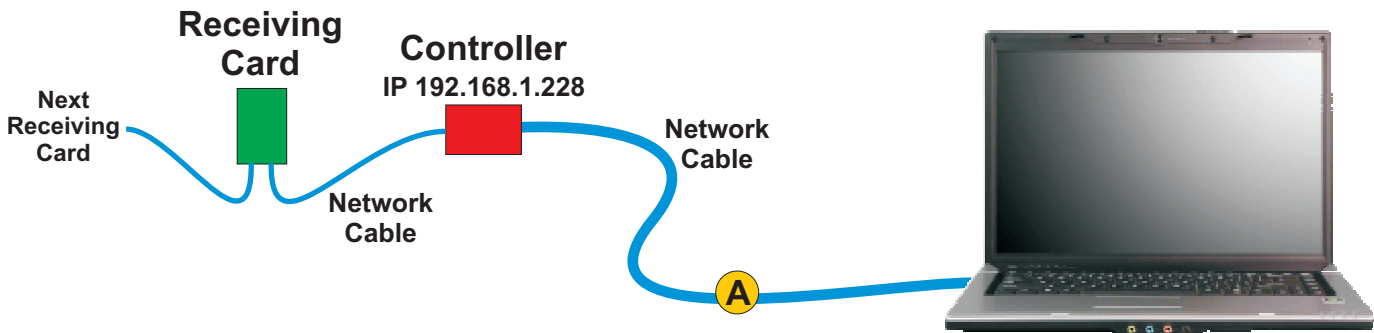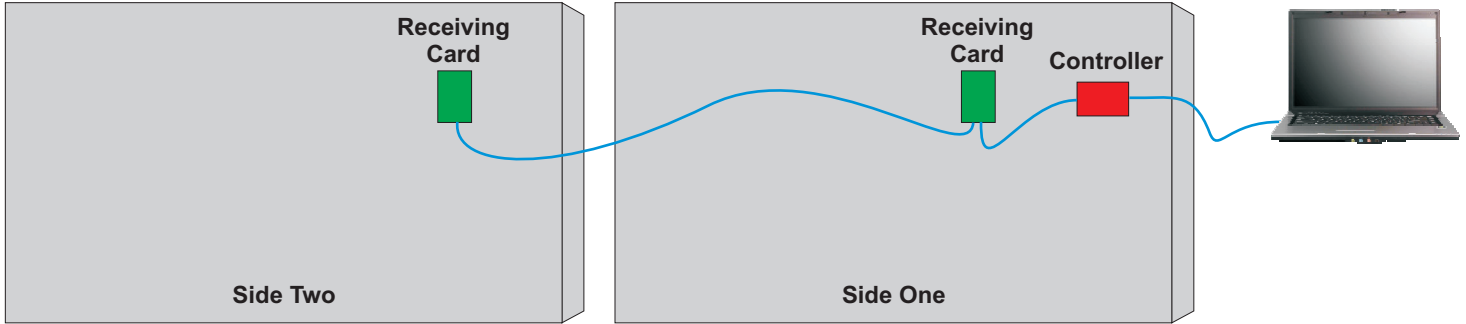


- A** CONNECT NETWORK CABLE FROM CONTROLLER TO LAPTOP
- B** CONFIGURE LOCAL AREA NETWORK ON LAPTOP
- C** CHANGE TCP/IPv4 TO 192.168.1.100
SUBNET MASK: 255.255.255.0

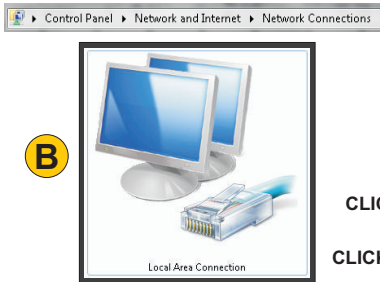

ON LAPTOP GO TO NETWORK CONNECTIONS

RIGHT CLICK AND GO TO PROPERTIES



CLICK ON Obtain an IP address automatically

CLICK ON Use the following IP address:

C IP address: ENTER → 192 . 168 . 1 . 100

Subnet mask: ENTER → 255 . 255 . 255 . 0

Default gateway: . . .

ENTER →